


SECTION X-X

BLOCK - B

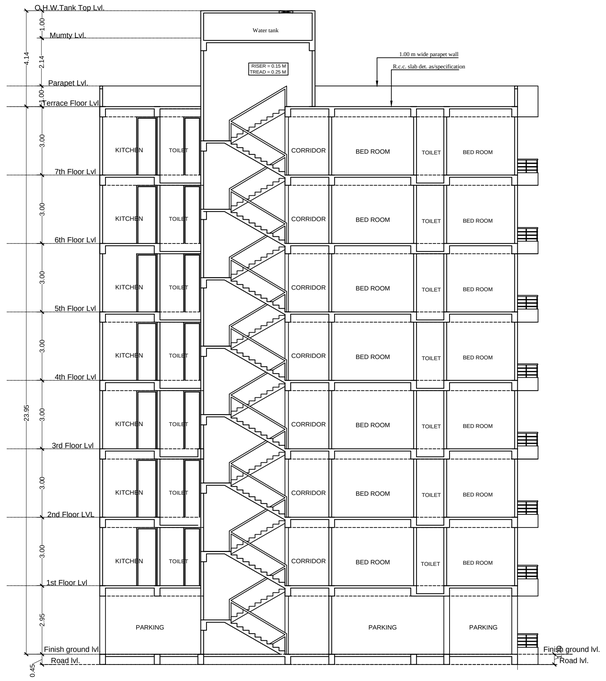


SECTION-Y-Y

BLOCK - B



FRONT ELEVATION

BLOCK - B

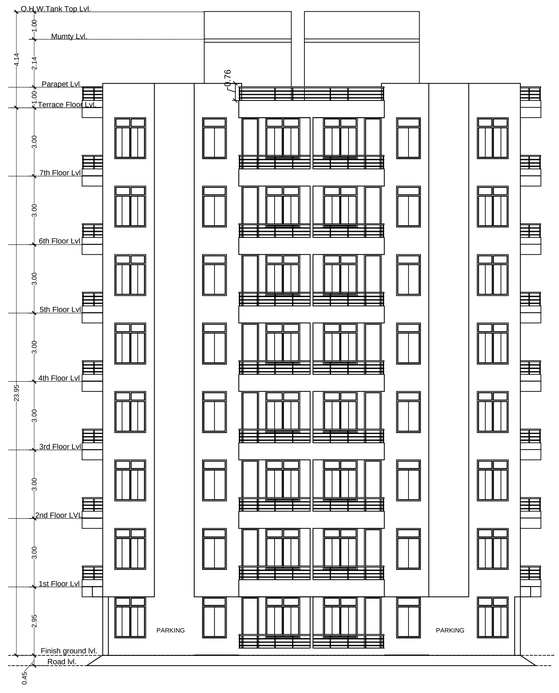

SIDE ELEVATION

BLOCK - B

SPECIFICATION:-

1. FOUNDATION R.C.C. UNDER REAMMED PILE FOUNDATION 8.0M DEEP WITH PROPER RE-INFORCEMENT.
2. SUPER STRUCTURE 1ST CLASS BRICK WORK IN SUPER STRUCTURE WITH CEMENT MORTAR (1:6)
3. PLINTH HEIGHT G.L. AND P.L. AS SHOWN IN SECTION
4. FLOORING 25mm THICK I.P.S. FLOORING OVER 125 TH. DRY REAMMED KHOA OVER 75mm TH. BRICK FLAT SOLLING OVER SAND FILLING
5. ROOF 10m THICK AVERAGE LIME TERRACING OVER R.C.C. ROOF SLAB.
6. DOORS CHOWKHATS OF DOORS TO BE SAL WOOD.
7. WINDOWS ALL WINDOWS TO BE FULLY GLAZED IN STEEL FRAME.
8. PLASTER 12mm THICK CEMENT PLASTER ON BOTH SIDE OF BRICK WALL.
9. COLOURING COLOUR OR WHITE WASH AS PER CHOICE.

PLOT DETAILS :-

PROPOSED RESI/COMM. BUILDING FOR
REALIZE REALCON PVT.LTD.
MANAGING DIRECTOR -SAILENDRA KUMAR GIRI,
S/O -SHIV KUMAR GIRI , ON - THANA NO- 78 ,
TAUZI NO - 7040, S. PLOT NO. - 2177,
KHATA NO. - 110,MAUZA - PANDEYPUR ,
THANA - BIHTA, DIST - PATNA,

SCALE.
1 : 100,

SIGN. OF EMPANELLED STRUCT. ENGINEER.

SIGNATURE OF OWNER/ DEVELOPER

SIGN. OF EMPANELED ARCHITECT.