



FRONT ELEVATION




SIDE ELEVATION

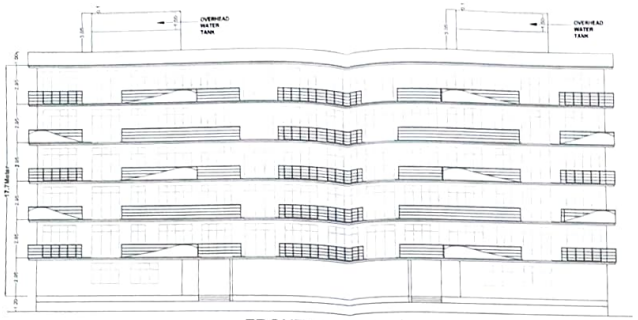


SECTION YY

## SCHEDULE OF D/W OPENING

| S.NO | TYPE | SIZE | SILL LVL | LINTEL LVL | REMARK |
|---|---|---|---|---|---|
| | DOOR SCHEDULE | | | | |
| 1 | D1 | 1.01 x 2.10 | 0.0 | 2.10 | DOOR |
| 2 | D2 | 0.90 x 2.10 | 0.0 | 2.10 | DOOR |
| 3 | D3 | 0.75 x 2.10 | 0.0 | 2.10 | DOOR |
| | WINDOW SCHEDULE | | | | |
| 6 | W1 | 1.41 x 1.73 | 0.75 | 2.49 | WINDOW |
| 7 | W2 | 1.07 x 1.73 | 0.75 | 2.49 | WINDOW |
| 8 | W3 | 0.95 x 1.73 | 0.75 | 2.49 | WINDOW |
| 9 | W4 | 0.91 x 1.50 | 0.99 | 2.49 | WINDOW |
| 11 | V | 0.61 x 0.76 | 1.73 | 2.49 | VENTILATOR |
| 12 | SW | 1.22 x 1.73 | 0.73 (from landing) | 2.49 | Staircase window (Typical floor) |

## LEGEND FOR FIRE FIGHTING

1) FIRE RESISTANT DOOR — FD
2) FIRE HYDRANT WET — H
3) HOSE REEL — HR
4) FIRE EXTINGUISHER (CO2 TYPE ISI MARKED) — CO2
5) MANUAL CALL POINT — MCP
6) ILLUMINATED EXIT DIRECTIONAL SIGN — EXIT
7) SIAMESE CONNECTION — SC
8) EMERGENCY LIGHT — EL
9) P A SYSTEM — PA
10) AUTOMATIC INDICATOR PANEL — AIP
11) UNDERGROUND WATER TANK OF 100,000 Ltrs. WITH 900 LPM PUMP FOR FIRE FIGHTING WITH MINIMUM PRESSURE OF 2 Kg/Cm2 — UGWT
12) SMOKE DETECTOR — SD
13) OVERHEAD FIRE TANK — OHWT

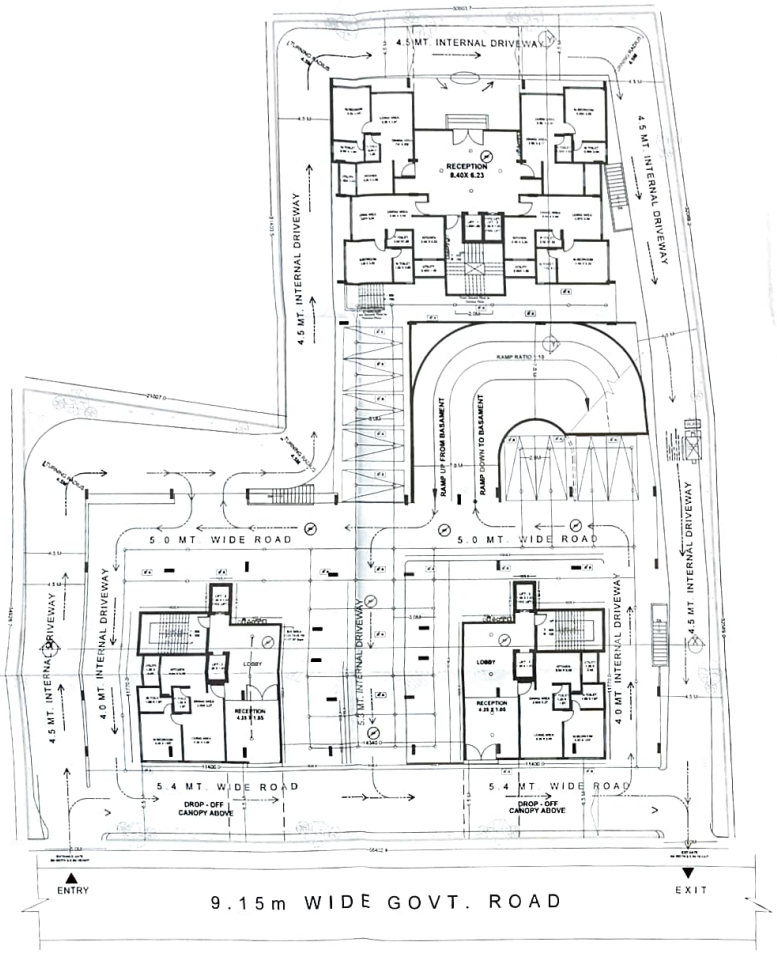


GROUND FLOOR PLAN



TYPICAL FLOOR PLAN
(1ST TO 5TH FLOOR)

# PROPOSED RESIDENTIAL BUILDING, AT RPS

PLOT NO- 118, 118/670(P)
KHATA NO- 163,167
TAUZI NO- 5527
THANA NO- 22
MAUZA -JALALPUR
DIST - PATNA

| SCALE | NORTH | SHEET NO |
|---|---|---|
| 1:100 | | 02/03 |

| NAME OF LAND-OWNERS | NAME OF DEVELOPER |
|---|---|
| TARA HOMES (Partner-Ranjan Kumar Maritya) & OTHERS | BHARTI MERTIYA DEEPAK CONSTRUCTION (Partner-Deepak Sagar ) & OTHERS |

## AREA STATEMENT

TOTAL PLOT AREA (as per deed) = 2949.04 SQ MTS
TOTAL PLOT AREA (as per site) = 2854.61 SQ MTS

| FLOOR | BUILTUP AREA | DEDUCTION |
|---|---|---|
| BASEMENT BUILTUP AREA | =128.19 Sq Mts | 00.00 SQ Mts |
| GROUND FLOOR BUILTUP AREA | = 552.58 Sq Mts | 00.00 SQ Mts |
| FIRST FLOOR BUILTUP AREA | = 1332.49 Sq Mts | 52.43 SQ Mts |
| SECOND FLOOR BUILTUP AREA | = 1332.49 Sq Mts | 52.43 SQ Mts |
| THIRD FLOOR BUILTUP AREA | = 1332.49 Sq Mts | 52.43 SQ Mts |
| FOURTH FLOOR BUILTUP AREA | = 1332.49 Sq Mts | 52.43SQ Mts |
| FIFTH FLOOR BUILTUP AREA | = 1332.49 Sq Mts | 52.43SQ Mts |
| TOTAL BUILTUP AREA | =7343.32 Sq Mts | 262.15 SQ Mts |

FAR = TOTAL BUILT UP AREA / TOTAL PLOT AREA = 7081.17 / 2854.61 = 2.48

## OCCUPANT LOAD (RESIDENTIAL)

NUMBER OF FLATS = 62 FLATS
5 PERSON / FLAT
NUMBER OF PERSON =62 x 5 = 310 PERSONS

## WATER TANK REQUIREMENT

135 LTRS./PERSON / DAY WATER CONSUMPTION
135 X 310 =41850.00 LTRS (41.85 M3)
25,000 LTRS LTRS FOR FIRE FIGHTING
TOTAL= 66.85 M3 (REQ)
WATER TANK SIZES PROVIDED
5.00M X 3.00M X1.50 M =22.50 M3 X 3 = 67.50 M3 (PROVIDED)

## SEPTIC TANK REQUIREMENT

0.08TM3/PERSON/DAY
SEPTIC TANK CAPACITY
0.087X 310 = 26.97 M3 (Required)
5.50 X2.50M X 2.00M =27.50 M3 (Provided)

## PARKING CALCULATION

PARKING AREA TO BE PROVIDED AS A 25% OF TOTAL BUILTUP AREA.
TOTAL BUILT UP AREA = 7081.17 SQ MTS
AREA TO BE PROVIDED = 1770.29 SQ MTS
BASEMENT PARKING AREA = **1705.05 SQ MTS**
GROUND FLOOR PARKING AREA = **347.00 SQ MTS**
PROVIDED COVERED PARKING = **2052.05 SQ MTS**

| SET BACK | DATE OF ISSUE |
|---|---|
| FRONT = 6.50 MTS<br>BACK = 4.50 MTS<br>REAR = 4.50 MTS | 01 / MAY / 2025 |

| SIGNATURE OF DEVELOPER | SIGNATURE OF ENGINEER |
|---|---|
| BHARTI MERTIYA DEEPAK CONSTRUCTION<br>Partner | Er. Manoj Kumar<br>STRUCTURAL ENGINEER<br>BRUCHD/ISE/23-6116<br>GOVT GOVERNMENT OF BIHAR |


SIGNATURE OF ARCHITECT

GAURAV KUMAR
B.Arch./2018/31393

Sanjay 7/7/26 J.E. Nagar Parishad Danapur Nizamat

7/7/26 नगर प्रबंधक नगर परिषद, दानापुर निजामत

Building Plan Sanctioned 7/7/26

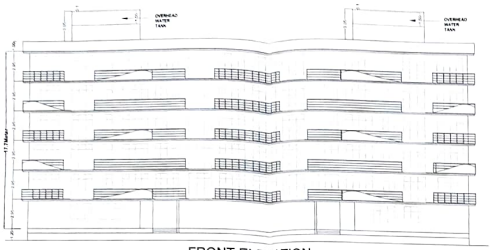


FRONT ELEVATION




SIDE ELEVATION



SECTION YY

## SCHEDULE OF D/W OPENING

| S.NO | TYPE | SIZE | SILL LVL | LINTEL LVL | REMARK |
|---|---|---|---|---|---|
| | DOOR SCHEDULE | | | | |
| 1 | D1 | 1.07 x 2.12 | 0.0 | 2.10 | DOOR |
| 2 | D2 | 0.90 x 2.10 | 0.0 | 2.10 | DOOR |
| 3 | D3 | 0.75 x 2.10 | 0.0 | 2.10 | DOOR |
| | WINDOW SCHEDULE | | | | |
| 6 | W1 | 1.41 x 1.75 | 0.75 | 2.49 | WINDOW |
| 7 | W2 | 1.21 x 1.75 | 0.75 | 2.49 | WINDOW |
| 8 | W3 | 0.59 x 1.75 | 0.75 | 2.49 | WINDOW |
| 9 | WA | 0.91 x 1.50 | 0.59 | 2.49 | WINDOW |
| 11 | V | 0.61 x 0.76 | 1.75 | 2.63 | VENTILATOR |
| 12 | WA | 1.22 x 1.75 | 0.75 (from landing) | 2.49 | WINDOW (Staircase) |

## LEGEND FOR FIRE FIGHTING

1) FIRE RESISTANT DOOR
2) FIRE HYDRANT VALT
3) HOSE REEL
4) FIRE EXTINGUISHER (CO2 TYPE 03 MARKED)
5) MANUAL CALL POINT
6) ILLUMINATED EXIT DIRECTIONAL SIGN
7) SIAMESE CONNECTION
8) EMERGENCY LIGHT
9) P.A SYSTEM
10) AUTOMATIC INDICATOR PANEL
11) UNDERGROUND WATER TANK OF 100 000 Ltrs. WITH 900 LPM PUMP FOR FIRE FIGHTING WITH MINIMUM PRESSURE OF 2 Kg/Cm2
12) SMOKE DETECTOR
13) OVERHEAD FIRE TANK

# PROPOSED RESIDENTIAL BUILDING, AT RPS

PLOT NO.- 118 (118/870P)
KHATA NO.- 163,167
TAUJI NO.- 5527
THANA NO.-22
MAUZA -LALAPUR
DIST - PATNA

| SCALE | NORTH | SHEET NO |
|---|---|---|
| 1:100 | | 02/03 |

| NAME OF LAND-OWNERS | NAME OF DEVELOPER |
|---|---|
| TARA HOMES (Partner-Ranjan Kumar Mertiya) & OTHERS | BHARTI MERTIYA DEEPAK CONSTRUCTION (Partner-Deepak Sagar) & OTHERS |

## AREA STATEMENT

TOTAL PLOT AREA (as per deed) = 2949.04 SQ.MTS
TOTAL PLOT AREA (as per site) = 2854.61 SQ.MTS

| FLOOR | BUILTUP AREA | DEDUCTION |
|---|---|---|
| BASEMENT BUILTUP AREA | =128.19 Sq.Mts | 00.00 SQ.Mts |
| GROUND FLOOR BUILTUP AREA | = 152.68 Sq.Mts | 00.00 SQ.Mts |
| FIRST FLOOR BUILTUP AREA | = 1332.49 Sq.Mts | 52.43 SQ.Mts |
| SECOND FLOOR BUILTUP AREA | = 1332.49 Sq.Mts | 52.43 SQ.Mts |
| THIRD FLOOR BUILTUP AREA | = 1332.49 Sq.Mts | 52.43 SQ.Mts |
| FOURTH FLOOR BUILTUP AREA | = 1332.49 Sq.Mts | 52.43SQ.Mts |
| FIFTH FLOOR BUILTUP AREA | = 1332.49 Sq.Mts | 52.43SQ.Mts |
| TOTAL BUILTUP AREA | = 7345.32 Sq.Mts | 312.75 SQ.Mts |

FAR = TOTAL BUILT UP AREA / TOTAL PLOT AREA = 7061.17 / 2854.61 = 2.48

## OCCUPANT LOAD (RESIDENTIAL)

NUMBER OF FLATS = 62 FLATS
5 PERSON / FLAT
NUMBER OF PERSON =62 x 5 = 310 PERSONS

## WATER TANK REQUIREMENT

135 LTRS./PERSON / DAY WATER CONSUMPTION
135 X 312 =41850 (0) LTRS (41.85 M3)
25,000 LTRS. LTRS FOR FIRE FIGHTING
TOTAL= 66.85 M3 (REQ)
WATER TANK SIZE PROVIDED
5.00M X 3.00M X1.50 M =22.50 M3 X 3 = 67.50 M3 (PROVIDED)

## SEPTIC TANK REQUIREMENT

0.06 M3/PERSON/DAY
SEPTIC TANK CAPACITY
0.06*X 310 = 29.07 M3 (Required)
5.50 X2.50M X 2.00M =27.50 M3 (Provided)

## PARKING CALCULATION

PARKING AREA TO BE PROVIDED AS A 25% OF TOTAL BUILTUP AREA.
TOTAL BUILT UP AREA = 7061.17 SQ.MTS.
AREA TO BE PROVIDED = 1779.29 SQ.MTS.
BASEMENT PARKING AREA = 1765.05 SQ.MTS
GROUND FLOOR PARKING AREA = 347.00 SQ.MTS
PROVIDED COVERED PARKING = 3953.05 SQ.MTS

| SET BACK | DATE OF ISSUE |
|---|---|
| FRONT = 6.50 MTS<br>BACK = 4.50 MTS<br>REAR = 4.50 MTS | 01 / MAY / 2025 |


SIGNATURE OF DEVELOPER

BHARTI MERTIYA DEEPAK CONSTRUCTION

SIGNATURE OF ENGINEER

Er. Manoj Kumar
STRUCTURAL ENGINEER
BR/5/HOUSE/23-0116
BOARD GOVERNMENT OF BIHAR
Patna


SIGNATURE OF ARCHITECT

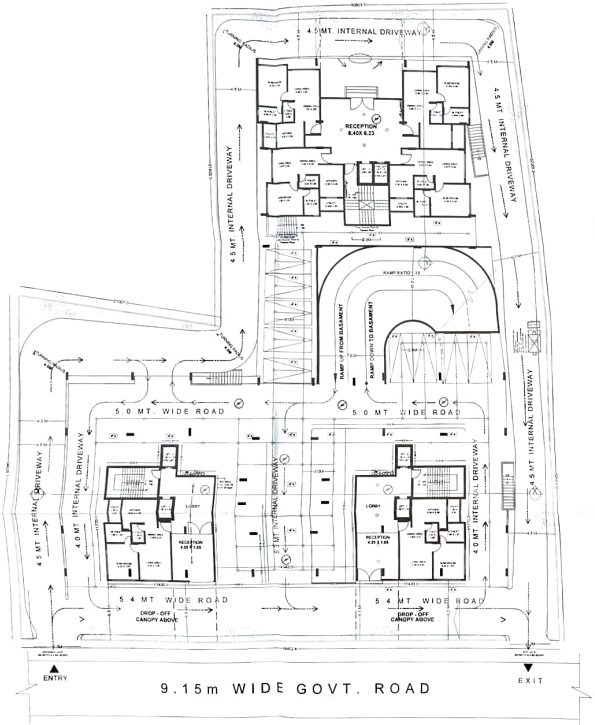



GROUND FLOOR PLAN




TYPICAL FLOOR PLAN
(1ST TO 5TH FLOOR)





KEY PLAN

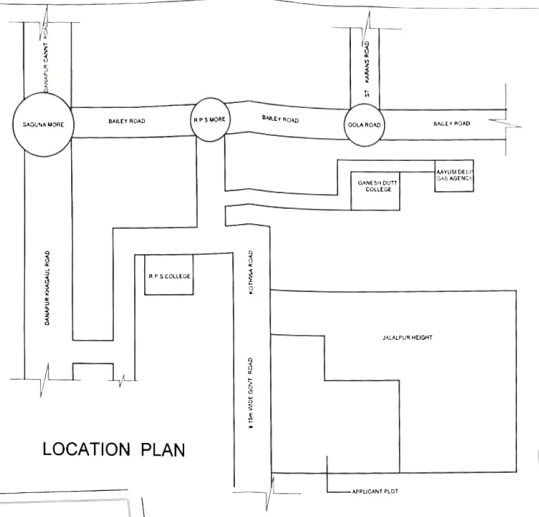


LOCATION PLAN

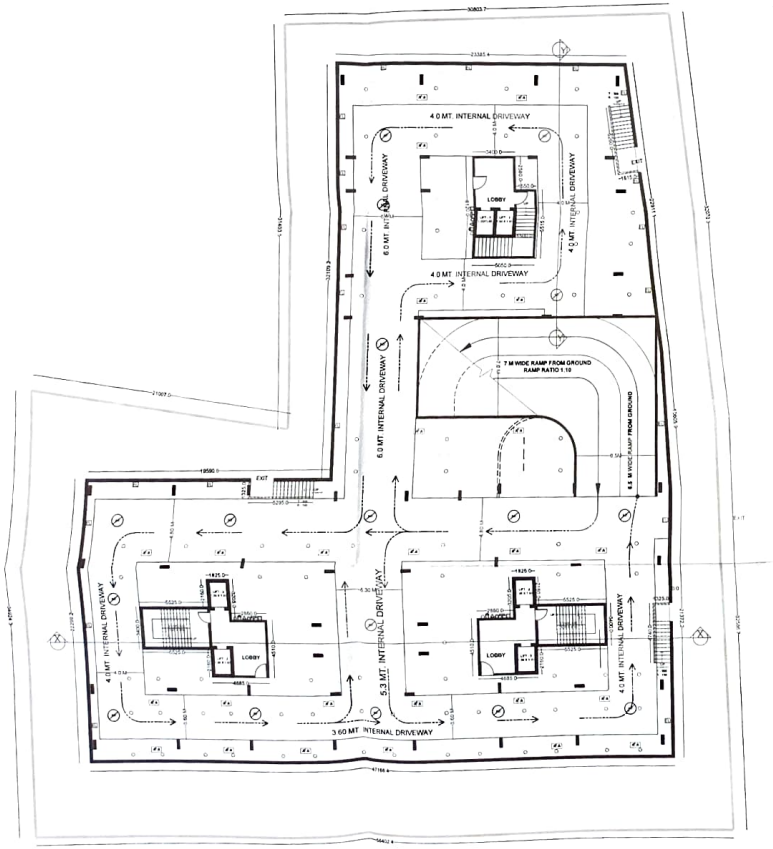


BASEMENT FLOOR PLAN

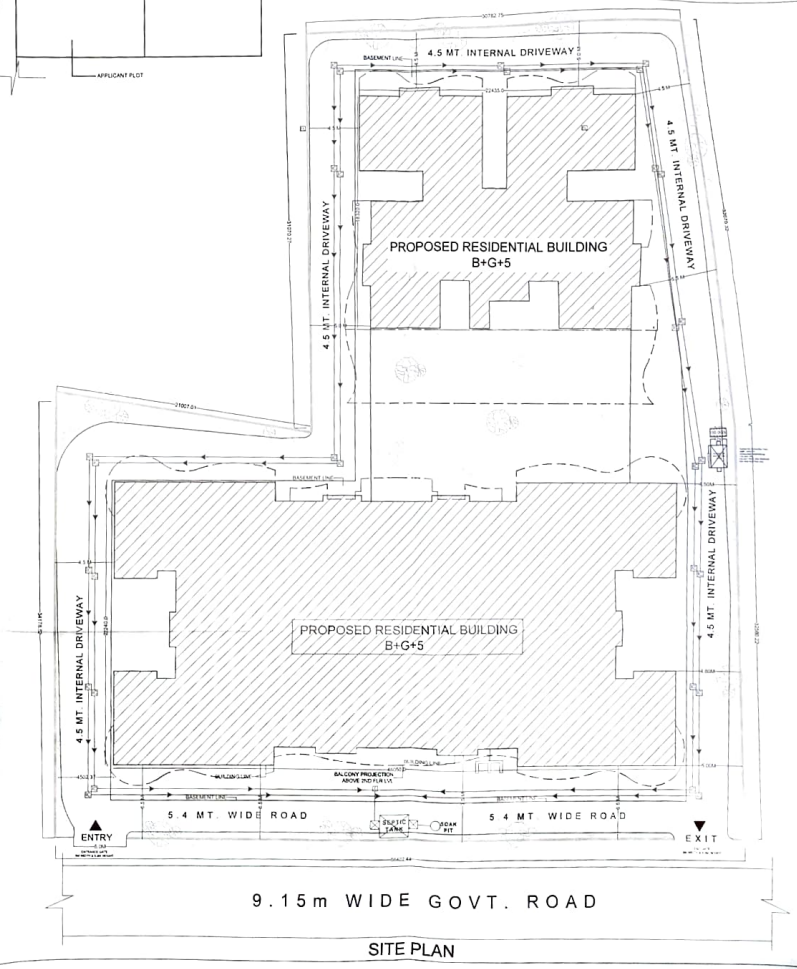


SITE PLAN

## SCHEDULE OF D/W OPENING

| S.NO | TYPE | SIZE | SILL LVL | UNTEL LVL | REMARK |
|---|---|---|---|---|---|
| | DOOR SCHEDULE | | | | |
| 1 | D1 | 1.07 x 2.10 | 0.0 | 2.10 | DOOR |
| 2 | D2 | 0.90 x 2.10 | 0.0 | 2.10 | DOOR |
| 3 | D3 | 0.75 x 2.10 | 0.0 | 2.10 | DOOR |
| | WINDOW SCHEDULE | | | | |
| 6 | W1 | 1.41 x 1.73 | 0.75 | 2.49 | WINDOW |
| 7 | W2 | 1.07 x 1.73 | 0.75 | 2.49 | WINDOW |
| 8 | W3 | 0.95 x 1.73 | 0.75 | 2.49 | WINDOW |
| 9 | W4 | 0.91 x 1.50 | 0.99 | 2.49 | WINDOW |
| 11 | V | 0.61 x 0.76 | 1.73 | 2.49 | VENTILATER |
| 12 | SW | 1.22 x 1.73 | 0.75 (from landing) | 2.49 | Staircase Window / Skylight |

## LEGEND FOR FIRE FIGHTING.

1)FIRE RESISTANT DOOR —FD—
2)FIRE HYDRANT WET —
3)HOSE REEL —
4)FIRE EXTINGUISHER (CO2 TYPE IS MARKED D) —CO2
5)MANUAL CALL POINT —
6)ILLUMINATED EXIT DIRECTIONAL SIGN EXIT
7)SIAMESE CONNECTION —
8) EMERGENCY LIGHT —
9) P A SYSTEM —
10) AUTOMATIC INDICATOR PANEL —
11) UNDERGROUND WATER TANK OF 100.000 Ltrs WITH 300 LPM PUMP FOR FIRE FIGHTING WITH MINIMUM PRESSURE OF 2 Kg/Cm2 — 30 HP
12) SMOKE DETECTOR —
13) OVERHEAD FIRE TANK — 25 HP

# PROPOSED RESIDENTIAL BUILDING, AT RPS MORE BESIDE JALALPUR HEIGHTS

PLOT NO- 118, 118/670(P)
KHATA NO- 163,167
TAUZI NO- 5527
THANA N0- 22
MAUZA -JALALPUR.
DIST - PATNA

| SCALE | NORTH | SHEET NO |
|---|---|---|
| 1:100 | | 01/03 |

| NAME OF LAND-OWNERS | NAME OF DEVELOPER |
|---|---|
| TARA HOMES (Partner-Ranjan Kumar Mertiya) & OTHERS | BHARTI MERTIYA DEEPAK CONSTRUCTION (Partner-Deepak Sagar ) & OTHERS |

## AREA STATEMENT

TOTAL PLOT AREA (as per deed) = 2949.04 SQ MTS
TOTAL PLOT AREA (as per site) = 2854.61 SQ MTS

| FLOOR | BUILTUP AREA | DEDUCTION |
|---|---|---|
| BASEMENT BUILTUP AREA | =128.19 Sq Mts. | 00.00 SQ Mts. |
| GROUND FLOOR BUILTUP AREA | = 552.68 Sq Mts. | 00.00 SQ Mts. |
| FIRST FLOOR BUILTUP AREA | = 1332.49 Sq Mts. | 52.43 SQ Mts. |
| SECOND FLOOR BUILTUP AREA | = 1332.49 Sq Mts. | 52.43 SQ Mts. |
| THIRD FLOOR BUILTUP AREA | = 1332.49 Sq Mts. | 52.43 SQ Mts. |
| FOURTH FLOOR BUILTUP AREA | = 1332.49 Sq Mts. | 52.43SQ Mts. |
| FIFTH FLOOR BUILTUP AREA | = 1332.49 Sq Mts. | 52.43SQ Mts. |
| TOTAL BUILTUP AREA | = 7343.32 Sq Mts. | 262.15 SQ Mts. |

F.A.R = TOTAL BUILT UP AREA / TOTAL PLOT AREA = 7081.17 / 2854.61 = 2.48

## OCCUPANT LOAD (RESIDENTIAL)

NUMBER OF FLATS = 62 FLATS
5 PERSON / FLAT
NUMBER OF PERSON =62 x 5 = 310 PERSONS

## WATER TANK REQUIREMENT

135 LTRS /PERSON / DAY WATER CONSUMPTION
135 X 310 =41850.00 LTRS (41.85 M3)
25,000 LTRS. LTRS FOR FIRE FIGHTING
TOTAL= 66.85 M3 (REQ)
WATER TANK SIZES PROVIDED
5.00M X 3.00M X1.50 M =22.50 M3 X 3 = 67.50 M3 (PROVIDED)

## SEPTIC TANK REQUIREMENT

0.06TM3/PERSON/DAY
SEPTIC TANK CAPACITY
0.06TK 310 = 26.97 M3 (Required)
5.50 X2.50M X 2.00M =27.50 M3 (Provided)

## PARKING CALCULATION

PARKING AREA TO BE PROVIDED AS A 25% OF TOTAL BUILTUP AREA.
TOTAL BUILT UP AREA = 7081.17 SQ MTS
AREA TO BE PROVIDED = 1770.29 SQ MTS
BASEMENT PARKING AREA = **1705.05 SQ MTS**
GROUND FLOOR PARKING AREA = **347.00 SQ MTS**
PROVIDED COVERED PARKING = **2052.05 SQ MTS**

| SET BACK | DATE OF ISSUE |
|---|---|
| FRONT = 6.50 MTS<br>BACK = 4.50 MTS<br>REAR = 4.50 MTS | 01 / MAY / 2025 |

SIGNATURE OF DEVELOPER

BHARTI MERTIYA DEEPAK CONSTRUCTION
Partner

SIGNATURE OF ENGINEER


Er. Manoj Kumar
STRUCTURAL ENGINEER
BR/UDHD/SE/23-2116
UDHD GOVERNMENT OF BIHAR

SIGNATURE OF ARCHITECT


Amarkant Kumar

नगर परिषद, दानापुर निकाय


J.E.
Nagar Parishad Danapur Nagarpal





**TYP.DET.OF PILE**




**TYP.DET.0F PILE CAP**

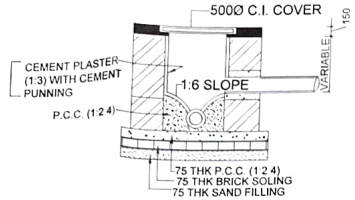


INSPECTION CHAMBER DETAILS.





**DET.OF RECHARGEBLE BORE WALL**

SCHEDULE OF D/W OPENING


| S.NO | TYPE | SIZE | SILL LVL | LINTEL LVL | REMARK |
|---|---|---|---|---|---|
| | DOOR SCHEDULE | | | | |
| 1 | D1 | 1.07 x 2.10 | 0.0 | 2.10 | DOOR |
| 2 | D2 | 0.90 x 2.10 | 0.0 | 2.10 | DOOR |
| 3 | D3 | 0.75 x 2.10 | 0.0 | 2.10 | DOOR |
| | WINDOW SCHEDULE | | | | |
| 6 | W1 | 1.41 x 1.73 | 0.75 | 2.49 | WINDOW |
| 7 | W2 | 1.07 x 1.73 | 0.75 | 2.49 | WINDOW |
| 8 | W3 | 0.85 x 1.73 | 0.75 | 2.49 | WINDOW |
| 9 | W4 | 0.91 x 1.52 | 0.99 | 2.49 | WINDOW |
| 11 | V | 0.61 x 0.76 | 1.73 | 2.49 | VENTILATER |
| 12 | SW | 1.22 x 1.73 | 0.75 (from landing) | 2.49 | Staircase Window (Typical Floor) |

LEGEND FOR FIRE FIGHTING.


1)FIRE RESISTANT DOOR — FD
2)FIRE HYDRANT WET — H
3)HOSE REEL — HR
4)FIRE EXTINGUISHER (CO2 TYPE ISI MARKED) — CO2
5)MANUAL CALL POINT
6)ILLUMINATED EXIT DIRECTIONAL SIGN — EXIT
7)SIAMESE CONNECTION
8) EMERGENCY LIGHT
9) P A SYSTEM — SPK
10) AUTOMATIC INDICATOR PANEL — AIP
11) UNDERGROUND WATER TANK OF 100.000 Ltrs. WITH 900 LPM PUMP — WT 100 FOR FIRE FIGHTING WITH MINIMUM PRESSURE OF 2 Kg/Cm2
12) OVERHEAD FIRE TANK — OH 5000

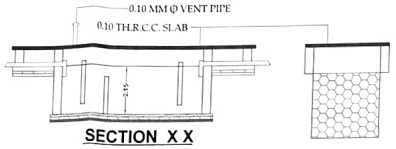


**SECTION X X**




**PLAN OF SEPTIC TANK AND SOAK PIT**

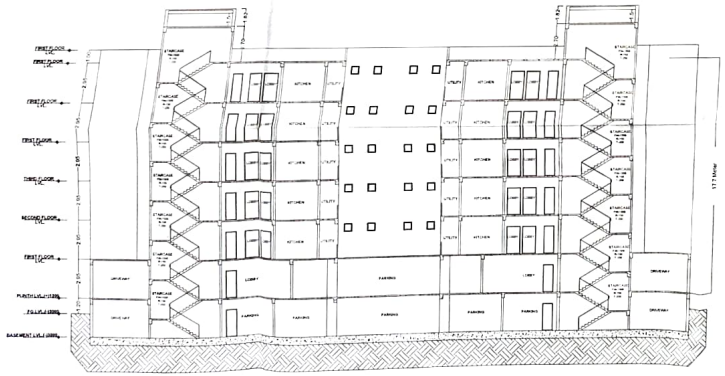


SECTION XX




**TERRACE FLOOR PLAN**

# PROPOSED RESIDENTIAL BUILDING, AT RPS

PLOT NO- 118, 118/670(P)
KHATA NO- 163,167
TAUZI NO- 5527
THANA NO- 22
MAUZA -JALALPUR
DIST - PATNA

| SCALE | NORTH | SHEET NO |
|---|---|---|
| 1:100 | | 03/03 |

| NAME OF LAND-OWNERS | NAME OF DEVELOPER |
|---|---|
| TARA HOMES (Partner-Ranjan Kumar Mertiya) & OTHERS | BHARTI MERTIYA DEEPAK CONSTRUCTION (Partner-Deepak Sagar ) & OTHERS |

AREA STATEMENT

TOTAL PLOT AREA (as per deed) = 2949.04 SQ MTS
TOTAL PLOT AREA (as per site) = 2854.61 SQ MTS

| FLOOR | BUILTUP AREA | DEDUCTION |
|---|---|---|
| BASEMENT BUILTUP AREA | =1281.19 Sq.Mts. | 00.00 SQ.Mts |
| GROUND FLOOR BUILTUP AREA | = 552.68 Sq.Mts. | 00.00 SQ.Mts |
| FIRST FLOOR BUILTUP AREA | = 1332.49 Sq.Mts. | 52.43 SQ.Mts |
| SECOND FLOOR BUILTUP AREA | = 1332.49 Sq.Mts. | 52.43 SQ.Mts |
| THIRD FLOOR BUILTUP AREA | = 1332.49 Sq.Mts. | 52.43 SQ.Mts |
| FOURTH FLOOR BUILTUP AREA | = 1332.49 Sq.Mts. | 52.43SQ.Mts. |
| FIFTH FLOOR BUILTUP AREA | = 1332.49 Sq.Mts. | 52.43SQ.Mts. |
| TOTAL BUILTUP AREA | = 7343.32 Sq.Mts. | 262.15 SQ.Mts |

F.A.R = TOTAL BUILT UP AREA / TOTAL PLOT AREA = 7081.17 / 2854.61 = 2.48

OCCUPANT LOAD (RESIDENTIAL)

NUMBER OF FLATS = 62 FLATS
5 PERSON / FLAT
NUMBER OF PERSON =62 x 5 = 310 PERSONS

WATER TANK REQUIREMENT

135 LTRS./PERSON / DAY WATER CONSUMPTION
135 X 310 =41850.00 LTRS (41.85 M3)
25,000 LTRS LTRS FOR FIRE FIGHTING
TOTAL= 66.85 M3 (REQ)
WATER TANK SIZES PROVIDED
5.00M X 3.00M X1.50 M =22.50 M3 X 3 = 67.50 M3 (PROVIDED)

SEPTIC TANK REQUIREMENT

0.08M3/PERSON/DAY
SEPTIC TANK CAPACITY
0.087K 310 = 26.97 M3 (Required)
5.50 X2.50M X 2.00M =27.50 M3 (Provided)

PARKING CALCULATION

PARKING AREA TO BE PROVIDED AS A 25% OF TOTAL BUILTUP AREA.
TOTAL BUILT UP AREA = 7081.17 SQ MTS
AREA TO BE PROVIDED = 1770.29 SQ MTS
BASEMENT PARKING AREA = **1705.05 SQ MTS**
GROUND FLOOR PARKING AREA = **347.00 SQ MTS**
PROVIDED COVERED PARKING = **2052.05 SQ MTS**

| SET BACK | DATE OF ISSUE |
|---|---|
| FRONT = 6.50 MTS.<br>BACK = 4.50 MTS<br>REAR = 4.50 MTS | 01 / MAY / 2025 |

| SIGNATURE OF DEVELOPER | SIGNATURE OF ENGINEER |
|---|---|
| BHARTI MERTIYA DEEPAK CONSTRUCTION | Er. Manoj Kumar, STRUCTURAL ENGINEER, BA/UDHD/SE/23-4/116, BIHAR GOVERNMENT OF BIHAR |

SIGNATURE OF ARCHITECT

Building Plan No. 72/25-26

Nagar Parishad Danapur Nizamat

नगर परिषद, दानापुर निजामत