



FRONT ELEVATION



REAR ELEVATION



DETS. OF PILES FOUNDATION






GROUND FLOOR PLAN



TYPICAL FLOOR PLAN

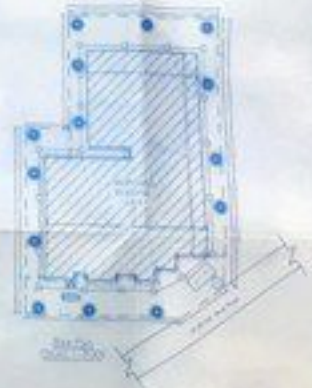

SECTION

SCHEDULE OF DOORS & WINDOWS

TYPE	WIDTH	HEIGHT	SILL LVL	DESCRIPTION
D1	1.00	2.10		FULLY PANELLED
D2	0.90	2.10		DO
D3	0.75	2.10		DO
W1	1.50	1.20	0.75	FULLY GLAZED
W2	1.20	1.20	0.75	DO
W3	0.60	0.60	1.05	DO
		1.20	0.75	DO
V	0.60	0.60		DO

WATER SUPPLY CALCULATION

TOTAL NO. OF FLAT = 16 NOS.
EACH FLAT HAVING 5 PERSON = 16 X 5 = 80 PERSON
PER PERSON REQD. AREA= 135 LTRS/DAY=80X135=10800 LTRS. +
EXTRA WATER TANK FOR FIRE FIGHTING = 10000 LTR.
TOTAL REQD. WATER TANK=10800 LTRS. + 20000=30800 LTR.

PARKING CALCULATION

TOTAL NO. OF FLAT = 16 NOS.
LCAR PARKING FOR EACH FLAT REQUIRED =16X1= 16 NOS.
LCAR PARKING NEED 20 PARKING SPACE = 16X20 = 320SQM.
COVERED PARKING = 320 SQM.
REST PARKING FRONT SET-BACK.

SEPTIC TANK CALCULATION

TOTAL NO. OF FLAT = 16 NOS.
FACH FLAT HAVING 5 PERSON = 16 X 5 = 80 PERSON.
PER PERSON REQD. AREA = 0.085 CUM./DAY
80 X 0.085 = 6.8 CUM. REQD.

AREA CALCULATION

TOTAL PLOT AREA	= 659.60
GROUND FL. BUILT - UP AREA	= 31.71
FIRST FL. BUILT - UP AREA	= 369.57
SECOND FL. BUILT - UP AREA	= 369.57
THIRD FL. BUILT - UP AREA	= 369.57
FOURTH FL. BUILT - UP AREA	= 369.57
TOTAL BUILT - UP AREA	= 1509.49
F.A.R.	= 2.29
% PLOT COVERAGE AREA	= 56.02 %

PROPOSED RESIDENTIAL BUILDING FOR SRI LAL BIHARI RAI S/O LATE RAM RATAN PRASAD & MRS. RUBI KHATOON W/O NO. FIROZ , SAIBAN CONSTRUCTION PVT.LTD , SHAHZAD AHMAD (DIRECTOR) , MAUZA - NOHSA , THANA NO - 38 ,KHATA NO - 475 , PLOT NO - 377 (P) , TAUZI NO - 1804 , THANA - PHULWARI SHARIF , DISTT. - PATNA

SIGNATURE OF OWNER

SIGNATURE OF ARCHITECT

प्रस्तावित नक्शा जो अंकित है वह जमा
की गई जरीब की संख्या का 373/(एकतीस) की जमा
किताब संख्या में अंकित है तथा डी.सी.रिजिस्ट्रार/कानूनगो
द्वारा किया जाना है।

अखिलेश आलम