





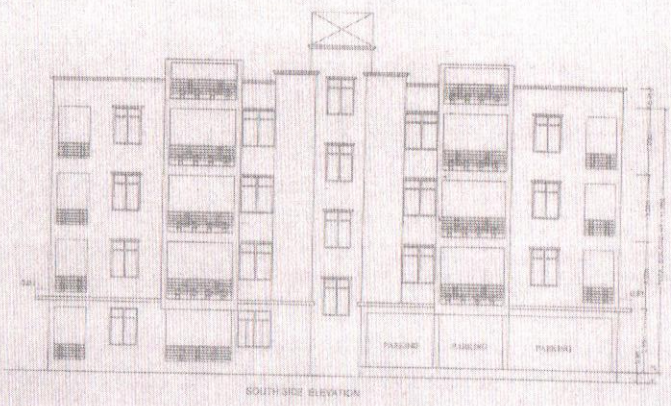

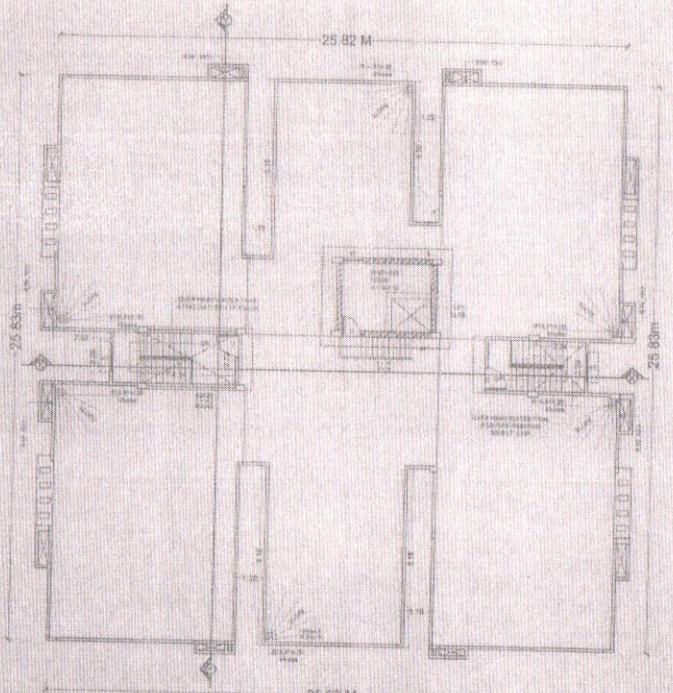

TERRACE FLOOR PLAN

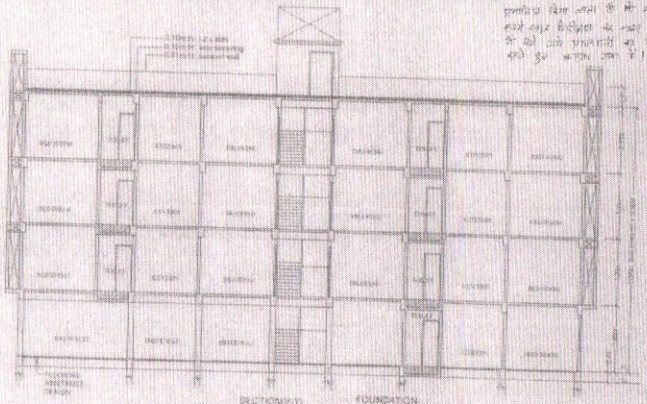

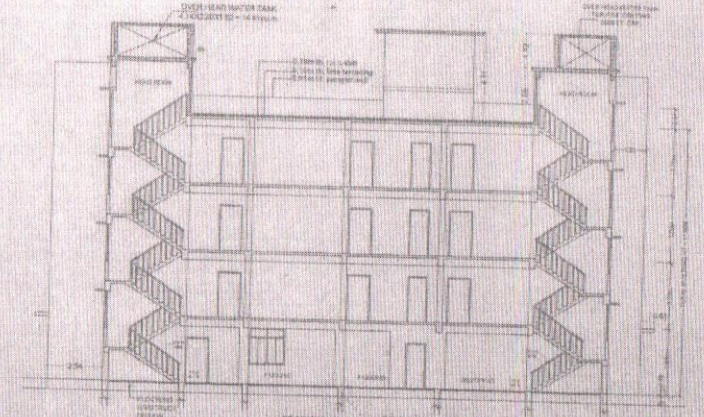

SEPTIC TANK CALCULATION

TOTAL NO. OF FLATS = 20 NOS.
TOTAL NO. OF PERSON = 20 X 5 = 100
1 PERSON 0.045 CU. M / PERSON / DAY
100 X 0.045 = 4.5 CU. M (provided)
CAPACITY OF SEPTIC TANK 6.5 CU. M(req.)
SIZE OF SEPTIC TANK =
2.10 X 2.74 X 1.81 = 10.02 CU. M (provided)

PARKING CALCULATION

TOTAL BUI AREA OF = 1951.33 SQM.
PARKING (REQ.) = 25% OF BUI AREA
1951.33X25% = 487.83 SQM.(REQ.)
PROVIDED OF GROUND FLOOR
PARKING AREA = 490.08 SQM.

WATER TANK CALCULATION

TOTAL NO. OF FLAT = 20
EACH FLAT 5 PERSON
TOTAL NOS OF POPULATION =20X5 = 100 (PERSON)
EACH PERSON NEED 135 Ls. PER DAY.
=100X135 = 13500 Ls. (lits.)
PROVIDED OF WATER TANK
= 4.14X2.29X1.52 = 14.41 CU. M (provided)

PLOT DETAILS :-

PROPOSED RESIDENCIAL BUILDING OF
SUNRISE SAI DEVELOPER S PVT LTD.
DIRECTOR :- PARAS KUMAR

SMT. SUNITA RANI W/O
LATE HARI MOHAN LAL
AT - MAUZA : JALALPUR
SURVEY PLOT NO :- 106,107
KHATA NO :- 115,113
TAUZI NO :- 5521
THANA NO :-22
P.S :- RUPASPUR, DIST PATNA

SHEET NO.	SCALE	NORTH
1/01	1:00	

Sunrise Sai Developers Pvt. Ltd.
Director

Brijesh Kumar Sinha

PARAS KUMAR
Sunrise Sai Developers Pvt. Ltd.

Building Plan No. 53/12-18