



SITE PLAN

NOTE :- ALL BLOCK - B+G+7
BUILDING HEIGHT- 24 M.
RECREATION CENTRE - G+2 (HEIGHT- 11.0M.)





WATER TANK CALCULATION BLOCK-1

TOTAL NO OF FLAT = 112 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 112 X 6 = 672
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 672 X 135 = 90720 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 90.720 CUM
PROVIDE AREA OF WATER TANK
SIZE = 7.0X3.0X1.52 FB = 31.92 CUM X2 = 63.84 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-2

TOTAL NO OF FLAT = 70 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 420 X 135 = 56700 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 56.700 CUM
PROVIDE AREA OF WATER TANK
SIZE = 7.0X3.0X1.52 FB = 31.92 CUM X2 = 63.84 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-3

TOTAL NO OF FLAT = 70 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 420 X 135 = 56700 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 56.700 CUM
PROVIDE AREA OF WATER TANK
SIZE = 7.0X3.0X1.52 FB = 31.92 CUM X2 = 63.84 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-4

TOTAL NO OF FLAT = 56 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 56 X 6 = 336
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 336 X 135 = 45360 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 45.360 CUM
PROVIDE AREA OF WATER TANK
SIZE = 6.0X3.0X1.52 FB = 27.36 CUM X2 = 54.72 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-5

TOTAL NO OF FLAT = 140 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 140 X 6 = 840
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 840 X 135 = 113400 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 113.400 CUM
PROVIDE AREA OF WATER TANK
SIZE = 9.0X3.0X1.52 FB = 41.04 CUM X3 = 123.12 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-6

TOTAL NO OF FLAT = 70 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 420 X 135 = 56700 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 56.700 CUM
PROVIDE AREA OF WATER TANK
SIZE = 7.0X3.0X1.52 FB = 31.92 CUM X2 = 63.84 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-7

TOTAL NO OF FLAT = 70 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 420 X 135 = 56700 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 56.700 CUM
PROVIDE AREA OF WATER TANK
SIZE = 7.0X3.0X1.52 FB = 31.92 CUM X2 = 63.84 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-8

TOTAL NO OF FLAT = 84 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 84 X 6 = 504
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 504 X 135 = 68040 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 68.040 CUM
PROVIDE AREA OF WATER TANK
SIZE = 8.0X3.0X1.52 FB = 36.48 CUM X2 = 72.96 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-9

TOTAL NO OF FLAT = 112 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 112 X 6 = 672
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 672 X 135 = 90720 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 90.720 CUM
PROVIDE AREA OF WATER TANK
SIZE = 5.5X3.0X1.52 FB = 25.08 CUM X4 = 100.32 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

WATER TANK CALCULATION BLOCK-10

TOTAL NO OF FLAT = 56 NOS
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 56 X 6 = 336
ONE PERSON REQU. WATER = 135 LTR /DAY
TOTAL REQU. WATER = 336 X 135 = 45360 LTR /DAY
TOTAL REQU. AREA OF WATER TANK = 45.360 CUM
PROVIDE AREA OF WATER TANK
SIZE = 6.0X3.0X1.52 FB = 27.36 CUM X2 = 54.72 CUM
OVER HEAD WATER TANK FOR FIRE - 10000 LTRS

SEPTIC TANK CALCULATION BLOCK-1

TOTAL NO OF FLAT = 112
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 112 X 6 = 672
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 672 X 0.085 = 57.12 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 8.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 24.32 CUM X3 = 72.96 CUM

SEPTIC TANK CALCULATION BLOCK-2

TOTAL NO OF FLAT = 70
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 420 X 0.085 = 35.70 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 7.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 21.28 CUM X2 = 42.56 CUM

SEPTIC TANK CALCULATION BLOCK-3

TOTAL NO OF FLAT = 70
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 420 X 0.085 = 35.70 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 7.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 21.28 CUM X2 = 42.56 CUM

SEPTIC TANK CALCULATION BLOCK-4

TOTAL NO OF FLAT = 56
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 56 X 6 = 336
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 336 X 0.085 = 28.56 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 5.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 15.2 CUM X2 = 30.40 CUM

SEPTIC TANK CALCULATION BLOCK-5

TOTAL NO OF FLAT = 140
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 140 X 6 = 840
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 840 X 0.085 = 71.40 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 9.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 27.36 CUM X3 = 82.08 CUM

SEPTIC TANK CALCULATION BLOCK-6

TOTAL NO OF FLAT = 70
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 420 X 0.085 = 35.70 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 7.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 21.28 CUM X2 = 42.56 CUM.

SEPTIC TANK CALCULATION BLOCK-7

TOTAL NO OF FLAT = 70
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 70 X 6 = 420
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 420 X 0.085 = 35.70 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 7.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 21.28 CUM X2 = 42.56 CUM.

SEPTIC TANK CALCULATION BLOCK-8


TOTAL NO OF FLAT = 84
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 84 X 6 = 504
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 504 X 0.085 = 42.84 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 7.5X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 22.80 CUM X2 = 45.60 CUM.

SEPTIC TANK CALCULATION BLOCK-9

TOTAL NO OF FLAT = 112
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 112 X 6 = 672
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 672 X 0.085 = 57.12 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 8.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 24.32 CUM X3 = 72.96 CUM


SEPTIC TANK CALCULATION BLOCK-10

TOTAL NO OF FLAT = 56
ONE FLAT 6 PERSON
TOTAL NO OF PERSON = 56 X 6 = 336
ONE PERSON REQU. AREA = 0.085 CUM /DAY
TOTAL REQU. AREA = 336 X 0.085 = 28.56 CUM /DAY
PROVIDE AREA OF SPTIC TANK
(SIZE) = 5.0X2.0X1.52 FB
TOTAL AREA OF SPTIC TANK = 15.2 CUM X2 = 30.40 CUM.

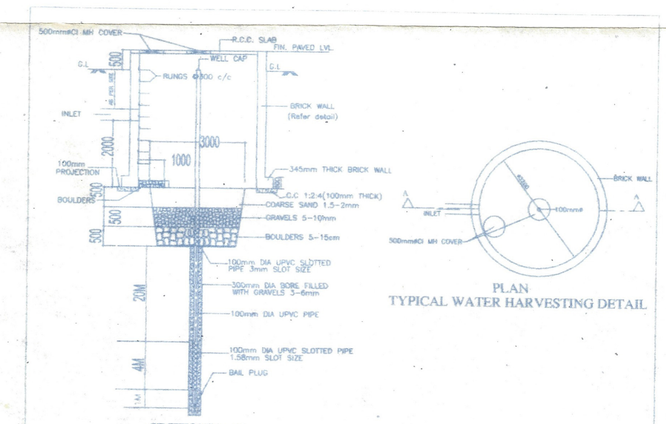

SECTION"A-A"

PLAN
TYPICAL WATER HARVESTING DETAIL

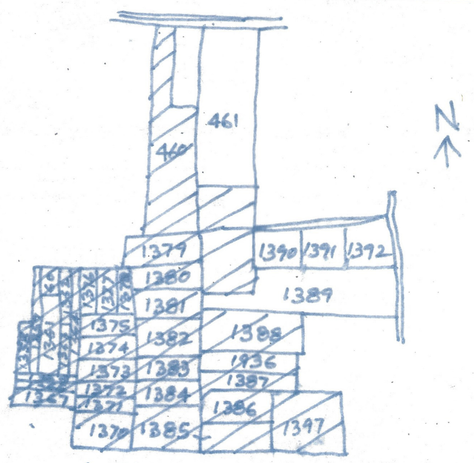

KEY PLAN
SCALE 1"=330'-0"

AREA STATEMENT BLOCK-1

BASEMENT PARKING AREA-	2086.71 SQM.
GROUND FLOOR PARKING AREA-	1754.25 SQM.
GROUND FLOOR B.U. AREA	65.00 SQM
FIRST FLOOR B.U. AREA	1740.40 SQM
2ND FLOOR B.U. AREA	1740.40 SQM
3RD FLOOR B.U. AREA	1740.40 SQM
4TH FLOOR B.U. AREA	1740.40 SQM
5TH FLOOR B.U. AREA	1740.40 SQM
6TH FLOOR B.U. AREA	1740.40 SQM
7TH FLOOR B.U. AREA	1740.40 SQM
TOTAL B.U. AREA	12247.80 SQM

AREA STATEMENT BLOCK-2

BASEMENT PARKING AREA-	1308.46 SQM.
GROUND FLOOR PARKING AREA-	1036.10 SQM.
GROUND FLOOR B.U. AREA	56.00 SQM
FIRST FLOOR B.U. AREA	1059.30 SQM
2ND FLOOR B.U. AREA	1059.30 SQM
3RD FLOOR B.U. AREA	1059.30 SQM
4TH FLOOR B.U. AREA	1059.30 SQM
5TH FLOOR B.U. AREA	1059.30 SQM
6TH FLOOR B.U. AREA	1059.30 SQM
7TH FLOOR B.U. AREA	1059.30 SQM
TOTAL B.U. AREA	7471.10 SQM

AREA STATEMENT BLOCK-3

BASEMENT PARKING AREA-	1528.70 SQM.
GROUND FLOOR PARKING AREA-	1175.09 SQM.
GROUND FLOOR B.U. AREA	56.50 SQM
FIRST FLOOR B.U. AREA	1198.85 SQM
2ND FLOOR B.U. AREA	1198.85 SQM
3RD FLOOR B.U. AREA	1198.85 SQM
4TH FLOOR B.U. AREA	1198.85 SQM
5TH FLOOR B.U. AREA	1198.85 SQM
6TH FLOOR B.U. AREA	1198.85 SQM
7TH FLOOR B.U. AREA	1198.85 SQM
TOTAL B.U. AREA	8448.45 SQM

AREA STATEMENT BLOCK-4

BASEMENT PARKING AREA-	1611.05 SQM.
GROUND FLOOR PARKING AREA-	1188.90 SQM.
GROUND FLOOR B.U. AREA	54.40 SQM
FIRST FLOOR B.U. AREA	1210.60 SQM
2ND FLOOR B.U. AREA	1210.60 SQM
3RD FLOOR B.U. AREA	1210.60 SQM
4TH FLOOR B.U. AREA	1210.60 SQM
5TH FLOOR B.U. AREA	1210.60 SQM
6TH FLOOR B.U. AREA	1210.60 SQM
7TH FLOOR B.U. AREA	1210.60 SQM
TOTAL B.U. AREA	8528.60 SQM

AREA STATEMENT BLOCK-5

BASEMENT PARKING AREA-	1527.00 SQM.
GROUND FLOOR PARKING AREA-	1189.02 SQM.
GROUND FLOOR B.U. AREA	65.90 SQM
FIRST FLOOR B.U. AREA	1446.10 SQM
2ND FLOOR B.U. AREA	1446.10 SQM
3RD FLOOR B.U. AREA	1446.10 SQM
4TH FLOOR B.U. AREA	1446.10 SQM
5TH FLOOR B.U. AREA	1446.10 SQM
6TH FLOOR B.U. AREA	1446.10 SQM
7TH FLOOR B.U. AREA	1446.10 SQM
TOTAL B.U. AREA	10188.60 SQM

AREA STATEMENT BLOCK-6

BASEMENT PARKING AREA-	1528.70 SQM.
GROUND FLOOR PARKING AREA-	1175.09 SQM.
GROUND FLOOR B.U. AREA	56.50 SQM
FIRST FLOOR B.U. AREA	1198.85 SQM
2ND FLOOR B.U. AREA	1198.85 SQM
3RD FLOOR B.U. AREA	1198.85 SQM
4TH FLOOR B.U. AREA	1198.85 SQM
5TH FLOOR B.U. AREA	1198.85 SQM
6TH FLOOR B.U. AREA	1198.85 SQM
7TH FLOOR B.U. AREA	1198.85 SQM
TOTAL B.U. AREA	8448.45 SQM

AREA STATEMENT BLOCK-7

BASEMENT PARKING AREA-	1528.70 SQM.
GROUND FLOOR PARKING AREA-	1175.09 SQM.
GROUND FLOOR B.U. AREA	56.50 SQM
FIRST FLOOR B.U. AREA	1198.85 SQM
2ND FLOOR B.U. AREA	1198.85 SQM
3RD FLOOR B.U. AREA	1198.85 SQM
4TH FLOOR B.U. AREA	1198.85 SQM
5TH FLOOR B.U. AREA	1198.85 SQM
6TH FLOOR B.U. AREA	1198.85 SQM
7TH FLOOR B.U. AREA	1198.85 SQM
TOTAL B.U. AREA	8448.45 SQM

AREA STATEMENT BLOCK-8

BASEMENT PARKING AREA-	1809.46 SQM.
GROUND FLOOR PARKING AREA-	885.41 SQM.
GROUND FLOOR B.U. AREA	54.40 SQM
FIRST FLOOR B.U. AREA	1446.10 SQM
2ND FLOOR B.U. AREA	1446.10 SQM
3RD FLOOR B.U. AREA	1446.10 SQM
4TH FLOOR B.U. AREA	1446.10 SQM
5TH FLOOR B.U. AREA	1446.10 SQM
6TH FLOOR B.U. AREA	1446.10 SQM
7TH FLOOR B.U. AREA	1446.10 SQM
TOTAL B.U. AREA	10187.10 SQM

AREA STATEMENT BLOCK-9


BASEMENT PARKING AREA-	1783.81 SQM.
GROUND FLOOR PARKING AREA-	676.76 SQM.
GROUND FLOOR B.U. AREA	54.00 SQM
FIRST FLOOR B.U. AREA	1398.00 SQM
2ND FLOOR B.U. AREA	1398.00 SQM
3RD FLOOR B.U. AREA	1398.00 SQM
4TH FLOOR B.U. AREA	1398.00 SQM
5TH FLOOR B.U. AREA	1398.00 SQM
6TH FLOOR B.U. AREA	1398.00 SQM
7TH FLOOR B.U. AREA	1398.00 SQM
TOTAL B.U. AREA	9840.00 SQM

AREA STATEMENT BLOCK-10

BASEMENT PARKING AREA-	1237.00 SQM.
GROUND FLOOR PARKING AREA-	918.78 SQM.
GROUND FLOOR B.U. AREA	56.40 SQM
FIRST FLOOR B.U. AREA	942.35 SQM
2ND FLOOR B.U. AREA	942.35 SQM
3RD FLOOR B.U. AREA	942.35 SQM
4TH FLOOR B.U. AREA	942.35 SQM
5TH FLOOR B.U. AREA	942.35 SQM
6TH FLOOR B.U. AREA	942.35 SQM
7TH FLOOR B.U. AREA	942.35 SQM
TOTAL B.U. AREA	6652.85 SQM

AREA STATEMENT RECREATION CENTRE

GROUND FLOOR B.U. AREA	293.62 SQM
FIRST FLOOR B.U. AREA	286.20 SQM
2ND FLOOR B.U. AREA	286.20 SQM
TOTAL B.U. AREA	866.02 SQM

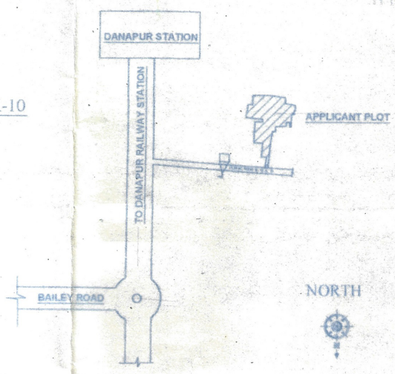

LOCATION PLAN

SPECIFICATION

1. R.C.C UNDER REMMED PILE FOUNDATION AS PER DETAIL GIVEN IN THIS DRAWING
2. 1ST CLASS BRICK WORK IN CEMENT MORTER(1:6) IN SUPER STRUCTURE
3. HEIGHT OF PLINTH FLOOR AREA SHOWN IN SECTION
4. 0.03 I.P.S. FLOORING OVER 0.75 DRY REMMED KHOA OVER FLAT BRICK SOLING OVER LOCAL SAND FILLING
5. 0.050 TH D.P.C. ON P.L. ALL ROUND THE BUILDING
6. 0.110 TH LIME CONCRETE OVER C 100TH R.C.C. SLAB
7. 0.15 TH R.C.C. BAND AT DOORS & WINDOWS OPENINGS
8. 0.12 CEMENT PLASTER ON BOTH SIDE OF WALL
9. WHITE & COLOUR WASH AS PER CHOICE

FIRE LEGEND

SL.NO.	SL.NO.	
1.	FD	FIRE RESISTANCE INT. DOOR OF 1/2 HR. FIRE RATING
2.		HYDRANT
3.		HOSE REEL
4.		4.5 KG MARKED FIRE EXIT
5.	EXIT	EXIT SIGN ILLUMINATED
6.		SEAMISE CONNECTION
7.	25,000	UNDER GROUND WATER STATIC TANK OF 25,000 LTR CAP.
8.	10,000	OVER HEAD WATER STATIC TANK OF 10,000 LTR CAP.
9.		MANUAL CALL ALARM POINT
10.		EMARGENCY LIGHT

UNDER GROUND WATER STATIC TANK OF 25,000 LTR. CAPACITY EACH BLOCK

PARKING CALCULATION

TOTAL BUILT UP AREA - 91327.42 SQM.
91327.42 OF 25% = 22831.855 SQM.
PROVIDED PARKING AREA- 28778.61 SQM.

PARKING CALCULATION

BLOCK	PARKING REQUIRED	PARKING PROVIDED
BLOCK-1	3061.95 SQM.	3820.96 SQM.
BLOCK-2	1867.77 SQM.	2344.46 SQM.
BLOCK-3	2112.11 SQM.	2703.79 SQM.
BLOCK-4	2132.15 SQM.	2799.95 SQM.
BLOCK-5	2547.15 SQM.	3162.12 SQM.
BLOCK-6	2112.11 SQM.	2703.79 SQM.
BLOCK-7	2112.11 SQM.	2703.79 SQM.
BLOCK-8	2546.77 SQM.	3224.81 SQM.
BLOCK-9	2460.00 SQM.	3159.16 SQM.
BLOCK-10	1663.21 SQM.	2155.78 SQM.
	22831.33 SQM.	28778.61 SQM.

WATER HARVESTING CALCULATION

100 SQM- 6 CUM REQUIRED
TOTAL TERRACE AREA - 13125.60 SQM
13125.60/ 100 = 131.256 X6 = 787.536 CUM.

AREA CALCULATION

TOTAL PLOT AREA - 36533.37 SQM.

TOTAL BUILT UP AREA BLOCK-1 = 12247.80 SQM.
TOTAL BUILT UP AREA BLOCK-2 = 7471.10 SQM.
TOTAL BUILT UP AREA BLOCK-3 = 8446.45 SQM.
TOTAL BUILT UP AREA BLOCK-4 = 8528.60 SQM.
TOTAL BUILT UP AREA BLOCK-5 = 10188.60 SQM.
TOTAL BUILT UP AREA BLOCK-6 = 8448.45 SQM.
TOTAL BUILT UP AREA BLOCK-7 = 8448.45 SQM.
TOTAL BUILT UP AREA BLOCK-8 = 10187.10 SQM.
TOTAL BUILT UP AREA BLOCK-9 = 9840.00 SQM.
TOTAL BUILT UP AREA BLOCK-10 = 6652.85 SQM.
TOTAL B.U UP AREA R.CENTRE = 866.02 SQM.

TOTAL BLOCK BIULT UP AREA = 91327.42 SQM.

F.A.R ------- 2.49

PROPOSED RESIDENTIAL BUILDING
SANCHAR NAGAR FOR M/S R.R BUILDERS AND DEVELOPERS
PARTNERS- 1. SRI RAJESH KUMAR
S/O SRI JAY PRAKASH NARAYAN SINGH
2. SMT. SUDHA KUMARI
D/O SRI BIRENDRA PRASAD SINGH
3. SRI DINESH KUMAR T.
S/O LATE JAMUNA PRASAD SINGH,
THANA- DANAPUR, DISTRICT- PATNA

MAUZA- ADAMPUR, THANA NO- 40			MAUZA- LAKHNIBIGHA, THANA NO- 41		
PLOT NO.	KHATA NO.	TAUZI NO.	PLOT NO.	KHATA NO.	TAUZI NO.
460	108	8712	1377	138	5225
461	108	8712	1380	3	5225
			1375	139	5225
			1374	2	5225
			1373	1	5225
			1381	4	5225
			1354	135	5225
			1382	29	5225
			1383	137	5225
			1384	5	5225
			1385	136	5225
			1386	134	5225
			1387	60	5225
			1936	60	5225
			1388	6	5225
			1376	140	5225
			1377	6	5225
			1378	6	5225
			1371	6	5225
			1364	91	5225
			1365	125	5225
			1366	138	5225
			1363	26	5225
			1361	30	5225
			1362	68	5225
			1370	118	5225
			1367	125	5225
			1369	96	5225
			1358	120	5225
			1359	61	5225
			1397	138	5225

NORTH	SCALE	DRG.NO.
	1:100 1:200	01

Chandramani Pandey
(Empanelled Supervisor)
Empanelment No.- Sup-18/2015-16
Nagar Parishad Khagaul, Patna
SIGN. OF TECH. PERSON

Arun Kumar Singh
(Structural Engineer)
Khagaul Nagar Parishad
LIC No.- 09/2015-17
SIGN. OF STRUCTURE

R.R BUILDERS & DEVELOPERS
SIGN. OF OWNER

Arun Kumar
(Empanelled Architect)
Empanelment No.- AR-56/2015-16
Nagar Parishad Khagaul, Patna
SIGN. OF ARCHITECT

Shankar Choudhary
20/07/2016

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT